



**Contractors & Industrial Supply
Electrode Handling Division**

1241 Foster Avenue
Nashville, TN 37210 U.S.A.
Phone: (615) 256-8658
Fax: (615) 256-1367

Website: www.electrode-handling.com
Email: sales@cisrigging.com


STEEL LIFT CAP

For use with male/female graphite electrodes, the Steel Electrode Lift Cap enables the operator to raise the electrode section from the horizontal to vertical position; spin down new electrode at the same thread pitch as the electrode being joined.

5 1/8" (130mm) to 12" (300mm) Electrode Diameter				
Diameter		Part Number	Weight	
in	mm		Lbs.	kg
5 1/8	130	500-0518	12	5.4
6	150	542-0608	13	5.9
7, 8	180 / 200	002-0804	17	7.7
9, 10	230 / 250	002-1094	25.5	11.6
12	300	002-1213	28.5	11.9

Features & Benefits

- **Robust Mill-Duty Steel Construction**
- **5 1/8" to 12" Electrode Diameters**
- **Internal Threaded Stem Allows For Easy Spin-Down**

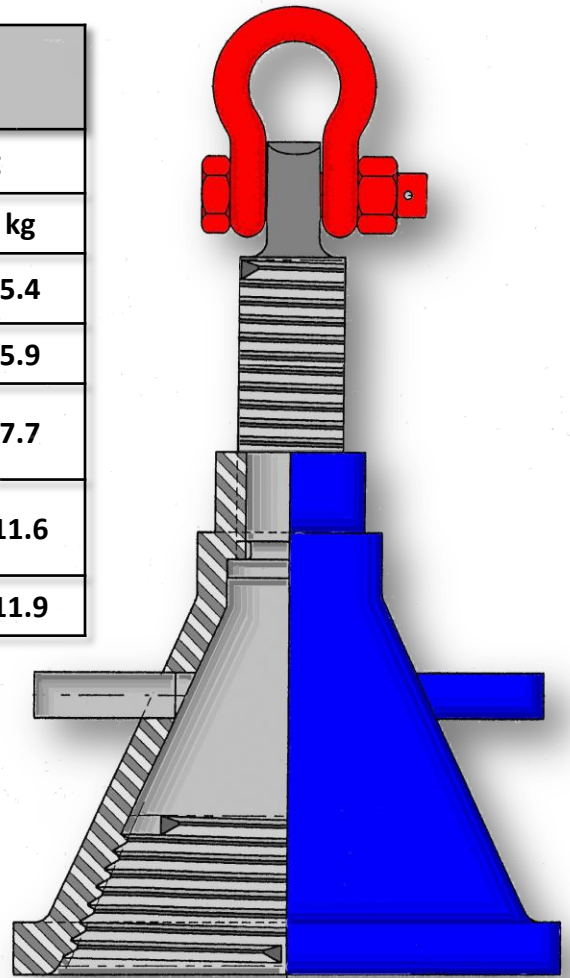

Certified Member



Compliant Products