



**Contractors & Industrial Supply Co., Inc.
Electrode Handling Division**

1241 Foster Avenue

Nashville, TN 37210 U.S.A.

Phone: (615) 256-8658 Fax: (615) 256-1367

Website: www.electrode-handling.com


Email: sales@cisrigging.com

PATENTED PNEUMATIC / HYDRAULIC TORQUE DEVICE



Range of Electrode Sizes: 14" (350mm) - 32" (800mm)

The performance and efficiency of your electrode column is only as good as the joint between the electrodes. An improperly torqued electrode is limited in its ability to effectively transfer energy, which results not only in less production, but also a faster rate of consumption for the electrode. Our pneumatic torquing device ensures a proper joint each and every time. This device allows the operators to "set-the-gap" between the joining electrodes, manually spin-down the joining electrode, and then torque the joint to the prescribed value as identified by the electrode manufacturer. This robust and well designed unit is completely serviceable by the end user ; requiring minimal maintenance, and spare parts are available upon request.

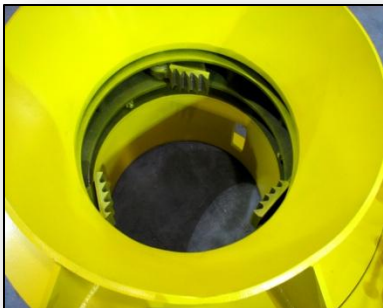

Certified Member



Compliant Products