



**Contractors & Industrial Supply Co., Inc.
Electrode Handling Division**

1241 Foster Avenue

Nashville, TN. 37210 U.S.A.

Phone: 615-256-8658 Fax: 615-256-1367

Website: www.electrode-handling.com

Email: sales@cisrigging.com

CUSHIONED LIFTING BASKET ASSEMBLY


BAIL DIMESIONS

THIS DEVICE IS USED FOR THE TRANSFER OF ELECTRODE COLUMNS FOR OFF FURNACE ASSEMBLY. IT ASSISTS IN NEGATING THE EFFECTS OF SHOCK LOADING THAT MAY OCCUR WHEN REMOVING AN ELECTRODE COLUMN FROM THE ELECTRIC ARC FURNACE.

- THESE DEVICES ARE DESIGNED WITH A 5 TO 1 SAFETY FACTOR.
- EACH DEVICE IS PROOF-TESTED TO 200% OF ITS RATED CAPACITY.
- DESIGNED TO BE USED WITH SPECIAL GRAPHITE LIFT PLUG W/ A PELICAN HOOK INSTALLED IN PLACE OF A NORMAL LIFTING BAIL.

PART NUMBER	BAIL TYPE	WIDTH (inches / mm)	LENGTH (inches / mm)
76267-S1	Small	4 3/8" / 111.13	4" / 101.6
76267-M2	Medium	5 5/8" / 142.88	8" / 203.2
76267-L3	Large	5 5/8" / 142.88	12" / 304.8
76267-XL4	Extra-Large	6" / 152.4	16" / 406.4

THIS SHOCK ABSORBING LIFTING DEVICE WILL CARRY A 24" (600 mm) DIAMETER COLUMN OF 3-1/3 (12,000 lbs. / 5,443.11 kg SWL) ELECTRODES WEIGHING 12,000 LBS.

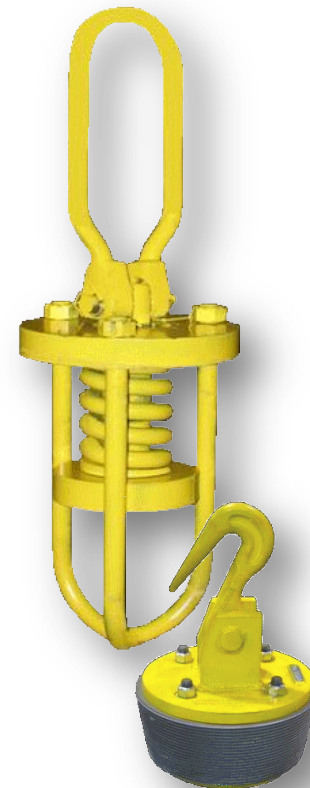

Certified Member



Compliant Products